



# IEC INLET FILTER

## General Purpose

### Features

- General conducted attenuation performance
- Compact design, lower cost
- With IEC320 AC socket
- Current rating 1A~15A
- Practical solution for medical devices

### Marketing Applications

- Medical power supply
- Remote health monitoring system
- UPS
- Anaesthesia machine
- Treatment ventilator

### Numbering System

**1 SS1 2 - P 3 4 5 - 6**

**1** Rated current

01,03,06,10,15

**2** Electrical schematic

A: medical compliance

**3** Components value (refer Filter selection table)

Blank:  $C_x = 0.1\mu F$

**4** Grounded choke (optional)

G:  $L_g = 100\mu H$

**5** Bleeder resistor (optional)

R:  $R = 1M\ \Omega$ ; 1/4W min.


**6** Output connections (refer Output terminal)

Q: fast-on tab (6.3mm)

W: with wired (100mm)




### Electrical Schematic •

• A: medical compliance

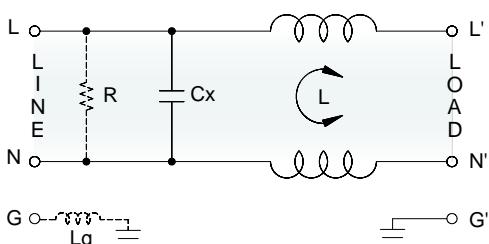

### Filter Attenuation

Insertion loss (dB) in 50 ohm system CISPR 17 (for reference only)

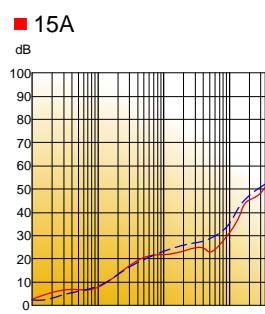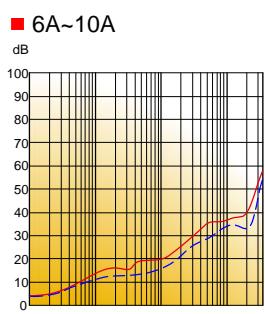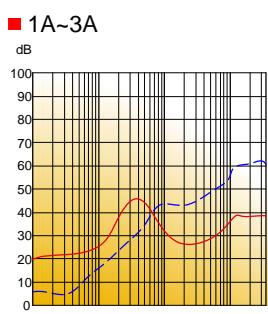

Common mode / Asymmetric (L-G) ———  
Differential mode / Symmetric (L-L) - - -


## Filter Selection Table •

Filter Part No.	Rated Current @50°C [A]	Leakage Current @250VAC/50Hz [µA]	Inductance @10KHz,0.25V [mH]	Capacitance Cx [µF]	Capacitance Cy [nF]	Output terminal
<b>A: medical compliance</b>						
01SS1A-P..	1	5	6.5	0.1	—	-Q -W
03SS1A-P..	3	5	2.5	0.1	—	-Q -W
06SS1A-P..	6	5	0.8	0.1	—	-Q -W
10SS1A-P..	10	5	0.2	0.1	—	-Q -W
15SS1A-P..	15	5	0.2	0.1	—	-Q -W


## Output Terminal

(unit: mm)

- **Q:** fast-on tab based on UL310 standard



- **W:** with wired



## Mechanical Drawing (unit: mm) •

- snap-in mount

